


1. Feature

- RS-232 and current loop communication format support.
- When disconnect communication, Auto recover for every communication speed RS-232 and current loop.
- Auto recognition every communication speed: 2400 ~ 115,200bps
- Can be connected all kind of indicators(Auto recognition of weighing data).
- 'ZERO', 'STEADY' condition lamp display.

2. Spec.

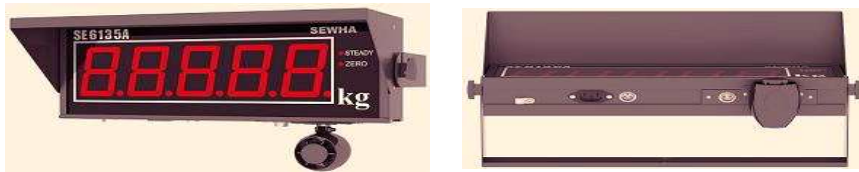


2-1. Front

- STEADY : Weight is stable, lamp 'on'.
- ZERO : Weight is zero, lamp 'on'.

2-2. Specification

Spec.	SE6125
Display unit	Red-FND 7-Segment (5 DIGITS)
Letter size	32.8 mm (L), 56.9 mm (H) 2.3inch
Comm.	CURRENT LOOP, RS-232C, [RS-422,RS-485 (Option)]
Power	FREE VOLTAGE (AC95V ~ AC240V)
Dimension	330mm(L)×130mm(H)×152mm(W)
Weight	2.0 Kg

3. Installation

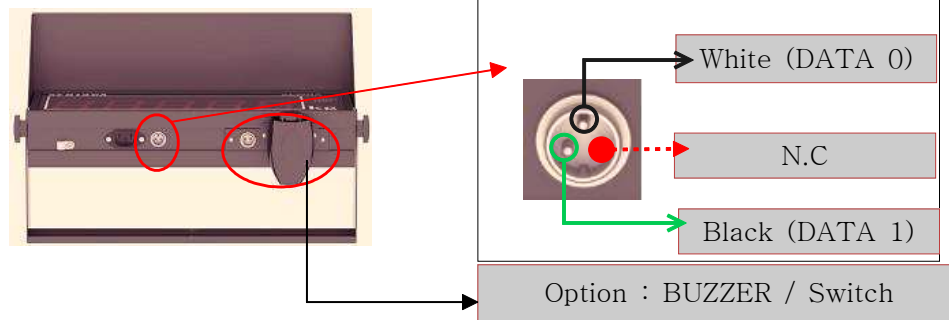

3-1. Connect AC Power

- This model uses AC95V ~ AC240V(Free voltage).Please use standard power cable. It can be cause for electric damage to use non-standard cable. And make sure the connection between and terminal.



Do not connect under humidity condition or wet hand.
It can be main reason for electric damage.



Please remove all electric connection, before connect or disconnect communication cable.

*Please use Cable's white and green color terminal.