

1. Feature

- RS-232 and current loop communication format support.
- When disconnect communication, Auto recover for every communication speed RS-232 and current loop.
- Auto recognition every communication speed: 2400 ~ 115,200bps
- Can be connected all kind of indicators(Auto recognition of weighing data).
- 'ZERO', 'STEADY' condition lamp display.


2. Appearance



3. Specification

Spec.	SE6135A
Display Unit	Red-FND 7-Segment (5 DIGITS)
Letter size	6 inch
Comm.	CURRENT LOOP, RS-232C, RS-422, RS-485
Power	FREE VOLTAGE (AC95V ~ AC240V)
Dimension	545mm(L) × 183mm(H) × 185mm(W)
Weight	9 Kg
Option	BUZZER, Switch

4. Installation

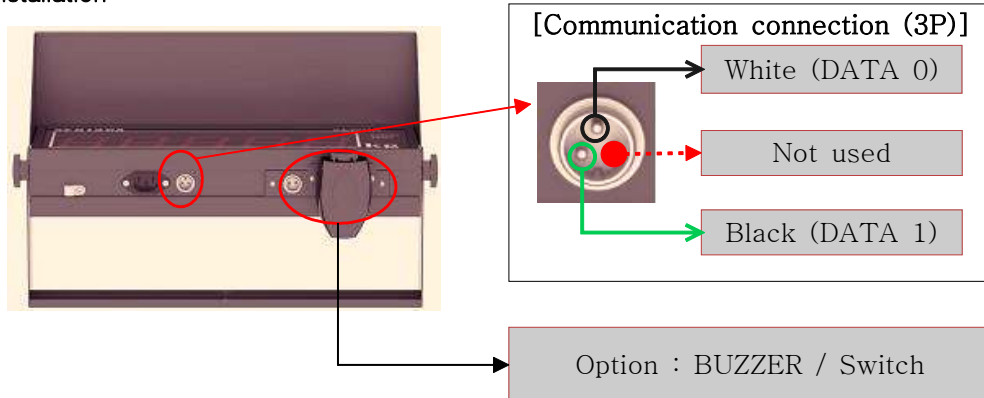

4-1. AC Power Connection

This model uses AC95V ~ AC240V(Free voltage).Please use standard power cable. It can be cause for electric damage to use non-standard cable. And make sure the connection between and terminal.



Do not connect under humidity condition or wet hand.
It can be main reason for electric damage.

4-2. Communication cable connection

This model can be used with serial communication regardless of it's polarity. Remind that shielded cable should be used.

You may use only white and green color cable which is provided.



경고

Please remove all electric connection, before connect or disconnect communication cable.

WARRANTEE CETIFICATION

This product is passed "Sewhacnm"s strict quality test.
If there is defect of manufacturing or abnormal detection within warrantee period, please contact our Agent or Distributor with this Warrantee certificate.Then, we will repair or replace free of charge.

WARRANTEE CLAUSE

- The Warrantee period, we can guarantee, is one(1) year from your purchasing date
- Warrantee Exception Clause
 - Warrantee period is expired.
 - Any kinds of Mal-function or defection caused by Modification or Repair without Sewhacnm's permission.
 - Any kinds of Mal-function, Defection, or External damage, caused by operator
 - Any kinds of Mal-function, Defection, caused by using spare part from Non-Authorized Distributor or Agent.
 - Any kinds of Mal-function, Defection, caused by not following Warnings or Cautions mentioned on this manual.
 - Any kinds of Mal-function, Defection caused by "Force Majeur", like Fire, Flood.
 - Without presentation of this "Warrantee Certification".
- Other
 - Any kinds of "Warrantee Certification" without authorized Stamp is out of validity

Manufacturer : SEWHACNM Co.,Ltd.
302, 102dong, Ssangyong
3rd,BucheonTechnoPark,
Samjeon-Dong, Ojeong-Gu,
Bucheon City, GyungGi-Do, KOREA
Tel : +82 32) 624 0060~4
Fax :+82 32) 624 0065

Product	REMOTE DISPLAY
Model	SE6145A
Version	
AUTHORIZED STAMP	